



MyJOY-4/9/12

Photographic Lamination with GMP PHOTOSURE Film



**Carrier-Free Operation
Hot & Cold Lamination
Temp Control**



MyJOY-4/9/12

- ◆ Professional laminators
- ◆ Low cost machines built to GMP exacting standards
- ◆ Compact and portable, stylish and simple to use
- ◆ Quality hot and cold lamination
- ◆ Perfect results with a wide range of document sizes in variety of thicknesses
- ◆ Remarkable, user-friendly operation for quick, quality results
- ◆ Super-Quick Warm-Up Time and Stable Temperature Control with Special Ruthenox Heater



ISO 9001:2000 CERTIFICATE




CERTIFICATE NUMBER: RM0807

GMP co., LTD.
www.gmp.com

MyJOY-4/9/12

Pouch Laminator

Guide to lamination

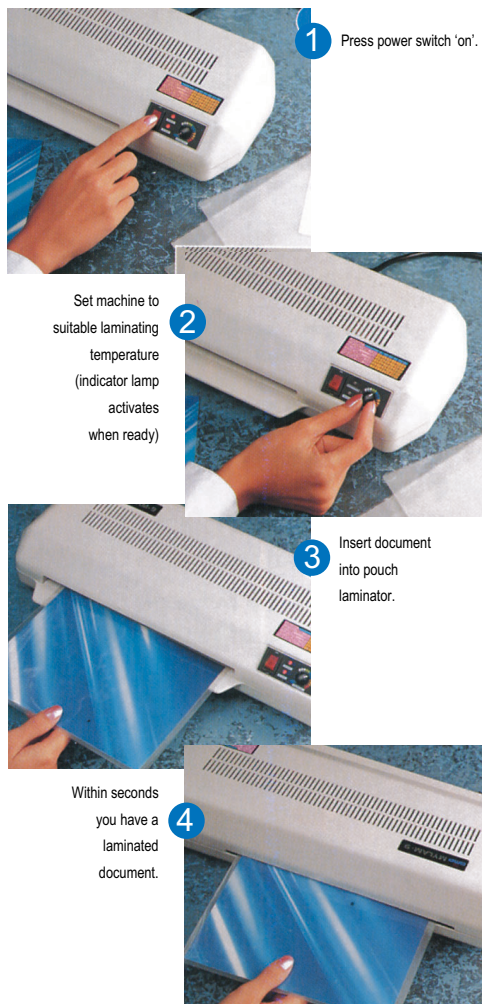

Your best investment in results-by design

Business cards, ID cards, luggage tags, membership cards, certificates, posters, documents in a variety of size.... the MyJOY range of versatile desktop laminators is ideal for most standard laminating applications.

As simple as they are safe to use, MyJOY laminators offer exceptional durability, performing consistently under repeated professional use. Protecting and enhancing a variety of documents, MyJOY laminators also ensure a tamper-proof finish for added security and value.

Photographic Lamination with GMP PHOTOSURE Film

- Ideal for all standard laminating applications
- Temperature guide table provided on laminator casing for ease of use
- Handles paper sizes from credit card to A3
- Carrier-free operation
- Water-proof and tamper-proof results every time
- Laminated documents are resistant to chemicals, oil and grease

Specifications

| Model Name | MYJOY-4 | MYJOY-9 | MYJOY-12 |
|-------------------------------|----------------------|--------------------------------|--------------------------------|
| Laminating Speed | 420mm/min | 50Hz:460mm/min, 60Hz:560mm/min | 50Hz:460mm/min, 60Hz:560mm/min |
| Laminating Width | 100mm | 230mm | 320mm |
| Laminating Films | 75mic~250mic | 75mic~250mic | 75mic~250mic |
| Thickness of substrate(Paper) | 80g/㎡~250g/㎡ | 80g/㎡~250g/㎡ | 80g/㎡~250g/㎡ |
| Power Requirements | 220~240V, 50/60Hz | 220~240V, 50/60Hz | 220~240V, 50/60Hz |
| Power Consumption | 240W, 1.0A | 470W, 2.0A | 520W, 2.1A |
| Warm Up Time | 1 minutes | 1 minutes | 1 minutes |
| Heating System | Heat Plate (Ruthnox) | Heat Plate (Ruthnox) | Heat Plate (Ruthnox) |
| Operating Temperature | 150℃ Max. | 150℃ Max. | 150℃ Max. |
| Speed Control | Fixed | Fixed | Fixed |
| Temperature Control | Knob & Volume | Knob & Volume | Knob & Volume |
| Dimensions(WxLxH) | 300 x 185 x 95mm | 425 x 185 x 95mm | 500 x 185 x 95mm |
| Type of Main Motor | Synchronous Motor-S | Synchronous Motor-S | Synchronous Motor-S |

Copyright GMP 2004. All rights reserved. Reproduction by any means of any image in this catalogue is prohibited without the prior consent of GMP and its authorized agent

GMP reserves the right to alter change specifications without prior notice.

- *Chromonex®: PP and PET composite Film
- *Photonex® : Heat Seal Laminating utilizing PVC material Film
- *Polynex® : Heat Seal Laminating utilizing OPP material Film
- *Micronex® : Heat Seal Laminating utilizing ultra thin dry overcoating Film